


GMA-D + PDT model



For the production of nutrition bags in EVA film

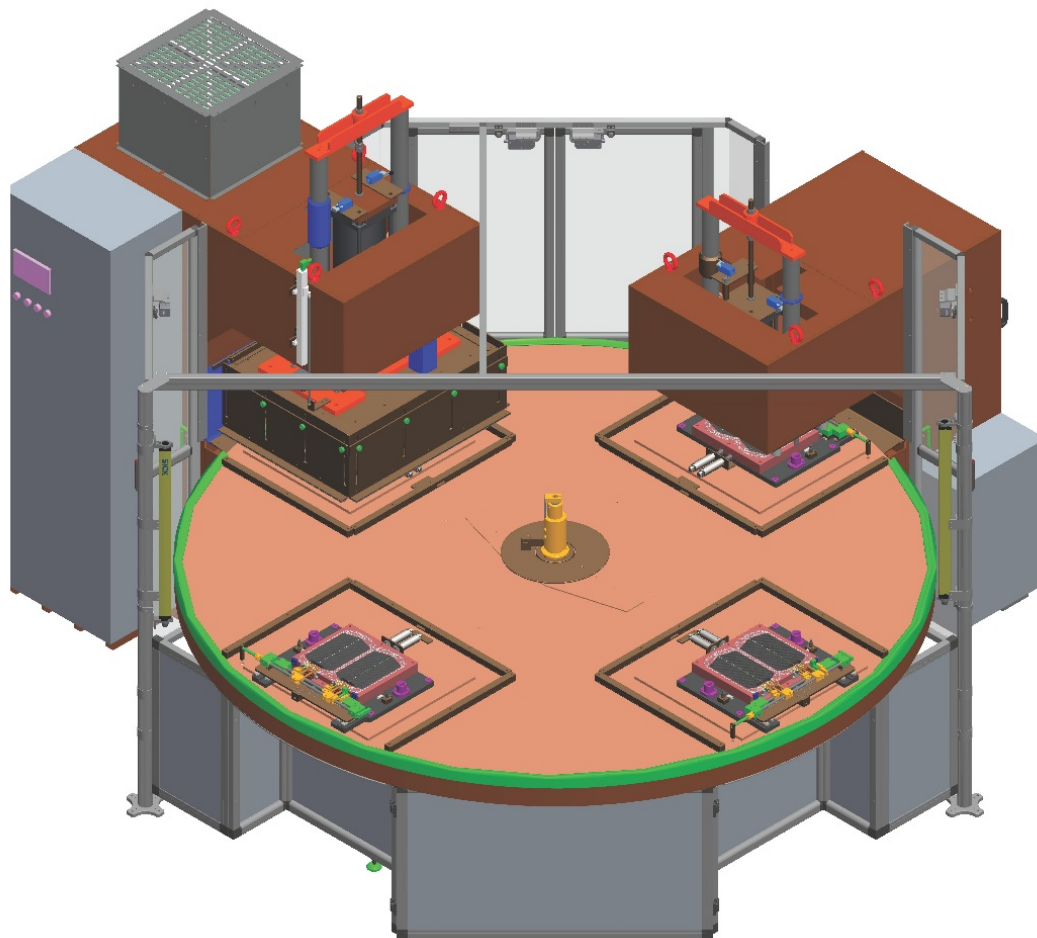

Composition

- High Frequency welding press hydraulically operated
- High Frequency generator built inside press frame
- Cutting press hydraulically operated
- Turntable with 4 working stations with adjusting turning speed
- N. 2 hydraulic power pack
- Refrigerating welding press and working station with liquid circulation (optional)
- Control panel with PLC and touch screen

Technical Characteristics

Welding press maximum closing force (adjustable):	2500 kg
Welding press electrode-holder plate dimension:	700x800 mm
Cutting press maximum closing force (adjustable):	10000 kg / 20000 kg
Cutting press punch-holder plate dimension:	700x800 mm
Turntable working stations dimension:	700x800 mm
Output power of the generator:	20 kW
Feeding voltage (on demand other voltages):	400 V (+/- 5%) – 3 PHASES + EARTH - 50 Hz